




|   |                    |            |
|---|--------------------|------------|
| Nominal power                                 | kW                 | 11         |
| Reduced power                                 | kW                 | 3,3        |
| Introduced thermal power (max)                | kW                 | 12,1       |
| Nominal water useful power                    | kW                 | -          |
| Reduced water useful power                    | kW                 | -          |
| Nominal efficiency                            | %                  | 91         |
| Reduced efficiency                            | %                  | 93,5       |
| Heating volume (min-max)                      | m <sup>3</sup>     | 79 - 264   |
| Nominal CO at 13% O <sub>2</sub>              | %                  | 0,0022     |
| Reduced CO at 13% O <sub>2</sub>              | %                  | 0,022      |
| Emissions CO (13% O <sub>2</sub> ) (min-max)  | mg/Nm <sup>3</sup> | 268 - 27   |
| Emissions OGC (13% O <sub>2</sub> ) (min-max) | mg/Nm <sup>3</sup> | 7,0 - 2,0  |
| Emissions NOX (13% O <sub>2</sub> ) (min-max) | mg/Nm <sup>3</sup> | 105 - 119  |
| Dust content at 13% O <sub>2</sub> (min- max) | mg/Nm <sup>3</sup> | 11 - 14    |
| Boiler capacity (H <sub>2</sub> O)            | l                  | -          |
| Hopper capacity                               | kg                 | 22         |
| Combustible                                   |                    | Pellet ø6  |
| Hourly consumption (min-max)                  | kg/h               | 0,73 - 2,6 |
| Autonomy (min-max)                            | h                  | 8,5 - 30   |
| Ignition electrical absorption (max)          | W                  | 360        |
| Operating electrical absorption (max)         | W                  | 137,3      |
| Supply and frequency                          | V - Hz             | 230 - 50   |
| Chimney flue depression                       | Pa                 | 10         |
| Exhaust diameter                              | mm                 | 80         |
| Combustion air inlet diameter                 | mm                 | 60         |
| Mass of smoke (min-max)                       | g/sec              | 3,7 - 7,1  |
| Exhaust fumes temperature (max)               | °C                 | 174        |
| Net weight                                    | kg                 | 108,7      |
| Gross weight                                  | kg                 | 121,5      |
| Exhaust fumes                                 | see                | A          |
| Hole combustion air inlet                     | see                | B          |
| Ducting outlet                                | see                | -          |
| Ducting capability up to                      | m                  | -          |



Art. 15A-B-VG 2015  
BlmSchV 2016  
Regensburg  
München  
Stuttgart  
Aachen

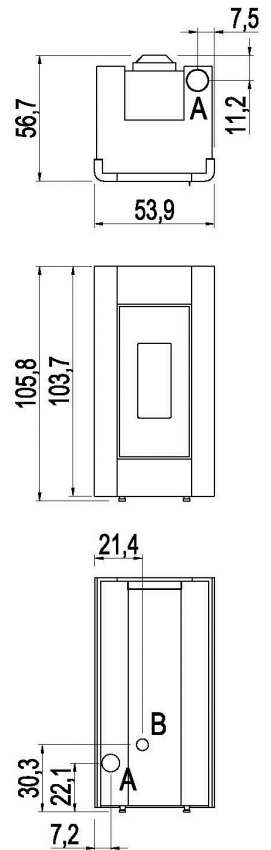

### MATCH

|         |                    |                   |
|---------|--------------------|-------------------|
| 7019042 | NEUTRAL STRUCTURE  | EAN 8053859011323 |
| 6915030 | Anthracite steel   | EAN 8033123616430 |
| 6915031 | White steel        | EAN 8033123616447 |
| 6914043 | Light bronze steel | EAN 8033123615884 |
| 6915032 | Red steel          | EAN 8033123616454 |
| 6919011 | Titanium steel     | EAN 8053859011255 |

### PLUS



Cast iron burning pot



Sealed chamber



Remote control



Connection to the room thermostat



Comfort mode



Upper and back exhaust



Wi-Fi kit (optional)




Cast iron door



Daily weekly programming


### STOVE PACKING



| L (cm) | H (cm) | P (cm) |
|--------|--------|--------|
| 80     | 124,5  | 70     |


|                          |
|--------------------------|
| VOLUME (m <sup>3</sup> ) |
| 0,70                     |

### LINING PACKING



|       | L (cm) | H (cm) | P (cm) |
|-------|--------|--------|--------|
| steel | 57     | 11,5   | 104,7  |

### STOCKING



### TRANSPORT

