




Nominal power	kW	6,5
Reduced power	kW	2,5
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	89,5
Reduced efficiency	%	93
Heating volume (min-max)	m ³	60 - 156
Nominal CO at 13% O ₂	%	0,008
Reduced CO at 13% O ₂	%	0,05
Nominal dust content at 13% O ₂	mg/Nm ³	16
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	8
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,5 - 1,5
Autonomy (min-max)	h	5,3 - 16
Ignition electrical absorption (max)	W	386
Operating electrical absorption (max)	W	54
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	2,4 - 4,4
Exhaust fumes temperature (max)	°C	172
Net weight	kg	92 - 98 - 107
Gross weight	kg	102 - 108 - 117
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-



Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

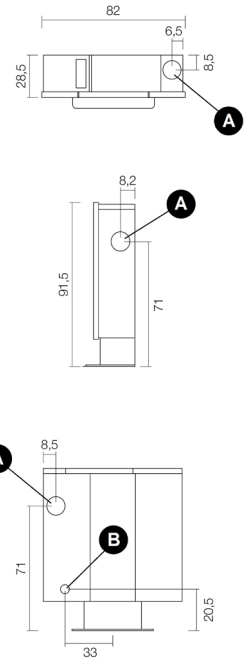

A+

PLUS

- Sealed chamber
- Comfort mode
- Daily weekly programming


- Stainless steel burning pot AISI
- Wi-Fi kit (optional)
- Connection to the external thermostat

- Overheating protection
- Remote control
- Upper, back and lateral exhaust

MATCH

7013004	NEUTRAL STRUCTURE	EAN 8033123611848
6913079	Anthracite steel	EAN 8033123614313
6913003	White steel	EAN 8033123612692
6915017	Light bronze steel	EAN 8033123616379
6913002	Red steel	EAN 8033123612708
6913001	Silver steel	EAN 8033123612715
6913006	Serpentino stone	EAN 8033123612654
6913005	White glass	EAN 8033123612739
6913004	Red glass	EAN 8033123612722


STOVE PACKING



L (cm)	H (cm)	P (cm)
120	54,6	100


VOLUME (m ³)
0,66

LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	83	10	22
glass	92	16	26
stone	83	10	22

STOCKING



TRANSPORT

