




Nominal power	kW	9,3
Reduced power	kW	2,7
Introduced thermal power (max)	kW	10,46
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	88,4
Reduced efficiency	%	94,2
Heating volume (min-max)	m ³	65-223
Nominal CO at 13% O ₂	%	0,012
Reduced CO at 13% O ₂	%	0,024
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	294 - 148
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	3,3 - 2,6
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	108 - 127
Dust content at 13% O ₂ (min-max)	mg/Nm ³	19,2 - 19
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,59 - 2,17
Autonomy (min-max)	h	6,9 - 25
Ignition electrical absorption (max)	W	346
Operating electrical absorption (max)	W	113,7
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11,9
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	2,6 - 5,7
Exhaust fumes temperature (max)	°C	197
Net weight	kg	94
Gross weight	kg	106
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	C
Ducting capability up to	m	6

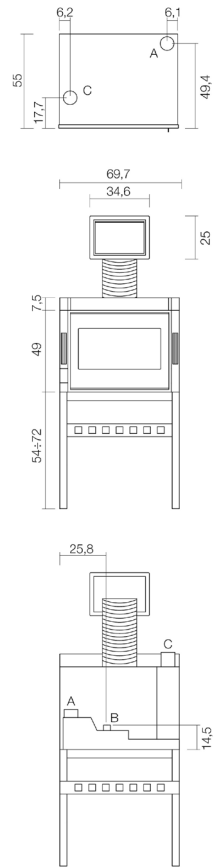


MATCH

7018023	Black steel	EAN 8053859010050
OPTIONAL :		
5020015	Optional Kit podium	EAN 8053859012832
5018001	Optional Pellet drawer	EAN 8053859010258
5018002	Optional Loading pellet door	EAN 8053859010265
5018006	Optional Frame	EAN 8053859010302
5018007	Optional Frame drawer	EAN 8053859010319
5018005	Optional Ducting Kit	EAN 8053859010296

PLUS

	Cast iron burning pot		Sealed chamber		Ducting Kit (optional)
	Aluminum auger		Connection to the external thermostat		Comfort mode
	Upper exhaust		Cast iron inner		Concentric flue kit (optional)
	Daily weekly programming		Remote control		Integrated Wi-Fi


STOVE PACKING



L (cm)	H (cm)	P (cm)
80	66	70


VOLUME (m ³)	0,37
--------------------------	------

LINING PACKING



L (cm)	H (cm)	P (cm)
-	-	-

STOCKING



TRANSPORT

